

OMRON Recommended Power Supply Guide

Switch Mode Power Supplies

## S8VK-S/S8FS-G

The choice is clear



It's not only the chameleon  
that has evolved to survive...

The choice is clear

# Power supplies to drive the new era

---

OMRON power supplies have evolved to keep pace with changes at manufacturing sites.

---

To survive in the rapidly changing market, manufacturing sites must also continually change.

OMRON looks at these changes as a global manufacturer and seller of control devices,  
and we use what we've learned from our own factory floor in our product development.

We continue to develop power supplies that meet the needs of the ever-changing manufacturing floor.

In order to maximize the added-value of equipment and control panels,  
we have created these two evolved power supplies.



\*Image: The chameleon has evolved over the years to be able to change its body color to protect it from enemies and to catch prey.  
This is the veiled chameleon, which lives in the Republic of Yemen. It grows to around 40 cm to 60 cm in length.

**For changes to the products manufactured**

We make compact power supplies that save space to support our customers' increasingly sophisticated equipment.



Compact



Side-by-side mounting



Conforms to transformer standards

**For changes to the places of manufacturing**

These power supplies can be used in tough environments, from cold regions to the tropics, and even at high altitudes.



Altitudes up to 3,000 m



Wide ambient operating temperature range



Life expectancy: 10 years\*1




**For changes to the people who manufacture**

Wiring can be easily done by workers of varying skill levels.



Push-In Plus Terminal Block



Cover to prevent screw dropout



Cover to prevent foreign matter ingress

Actual size

**Industry's smallest class\*2**  
General-purpose Power Supply S8FS-G 300 W



**World's smallest\*2**  
DIN rail-mounting Power Supply S8VK-S 240 W

**Power supplies this small, only from OMRON**

\*1. Life expectancy depends on certain conditions. Refer to the datasheet of each product for details.  
\*2. According to OMRON investigation in November 2016.


# Selection is Easy.

For DIN rail-mounting



-  Compact
-  Side-by-side mounting
-  Conforms to transformer standards
-  Altitudes up to 3,000 m
-  Ambient operating temperature of -40°C to 70°C
-  **10 YEARS** Life expectancy: 10 years
-  Push-In Plus Terminal Block
-  **UL CERTIFIED**

## DIN rail-mounting Power Supply **S8VK-S**

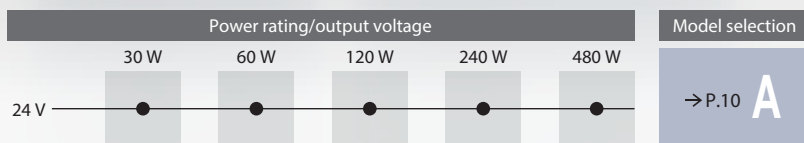

## Saves Space, Allowing Control Panel Downsizing


### World's smallest\*<sup>1</sup>

The space required for the power supply is reduced, allowing the control panel to be downsized and components to be added inside the control panel.



### Side-by-side mounting\*<sup>3</sup>


Cooling space between power supplies is not necessary, reducing the installation area. This enables greater flexibility in control panel design.

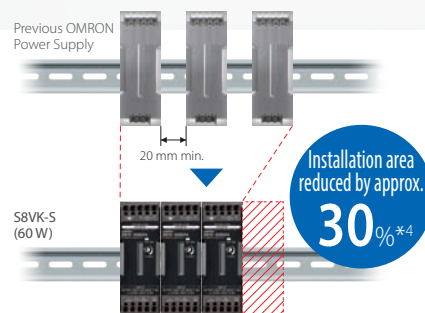

## Reduced Wiring Work

### Push-In Plus Terminal Block

It's as easy as inserting an earphone jack. Tools are not required for wiring, reducing the time and work.

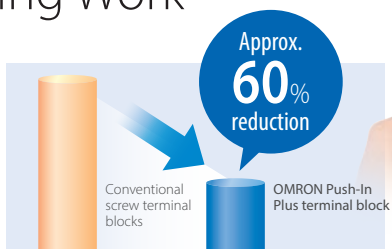

Note: Information for Push-In Plus and screw terminal blocks is based on OMRON's actual measurement value data.

\*1. According to OMRON investigation in November 2016.  
 \*2. Comparison to previous OMRON Power Supply.  
 \*3. Conditions apply to models and derating for side-by-side mounting.  
 \*4. Comparing mounting of three OMRON S8VK-G (60 W) units to side-by-side mounting of three S8VK-S (60 W) units.

# Which Type Will You Choose?

For installation  
in equipment



## General-purpose Power Supply **S8FS-G**

|      | Power rating/output voltage |      |      |       |       |       | Model selection |   |
|------|-----------------------------|------|------|-------|-------|-------|-----------------|---|
|      | 15 W                        | 30 W | 50 W | 100 W | 150 W | 300 W |                 | 600 W   |
| 48 V |                             |      |      |       | ●     | ●     | ●               | With cover/<br>Direct-mounting<br>type → P.12 <b>E</b>                  |
| 24 V | ●                           | ●    | ●    | ●     | ●     | ●     | ●               |   |
| 15 V | ●                           | ●    | ●    | ●     | ●     | ●     | ●               | With cover/<br>Direct-mounting<br>type (Connector type) → P.12 <b>F</b> |
| 12 V | ●                           | ●    | ●    | ●     | ●     | ●     | ●               |   |
| 5 V  | ●                           | ●    | ●    | ●     | ●     | ●     | ●               | With cover/<br>DIN rail-mounting<br>type → P.12 <b>G</b>                |

## Prevents Trouble during Installation and Maintenance

### Cover to prevent screw dropout

The terminal block cover features a screw dropout prevention mechanism. Screws will not drop when connecting terminals, making work easier.



### Cover to prevent foreign matter ingress

The front cover guards against ingress of foreign matter. This prevents accidental insertion of tools and protects against electric shocks.



## Enables Stable Operation of Devices and Equipment over Long Periods of Time

### Features a 10-year life expectancy, including for the fan

These units have a 10-year life expectancy, including for the cooling fan, which in the past required maintenance and replacement.

# A Wide Variety of Models Support

## DIN Rail Mounting, Small Capacity Power Supply

These models are recommended for capacities of 15 W and 30 W.



**S8VK-G**

|      | Power rating/output voltage |      |      |       |       |       |
|------|-----------------------------|------|------|-------|-------|-------|
|      | 15 W                        | 30 W | 60 W | 120 W | 240 W | 480 W |
| 48 V |                             |      |      |       | ●     | ●     |
| 24 V | ●                           | ●    | ●    | ●     | ●     | ●     |
| 12 V | ●                           | ●    | ●    |       |       |       |
| 5 V  | ●                           | ●    |      |       |       |       |

Model selection

→ P.10 **B**



Conforms to transformer standards



Ambient operating temperature of -40°C to 70°C



Life expectancy: 10 years



## DIN Rail Mounting, 3-Phase Input

These models are recommended for 3-phase 400 VAC input.



**S8VK-T**

|      | Power rating/output voltage |       |       |       |
|------|-----------------------------|-------|-------|-------|
|      | 120 W                       | 240 W | 480 W | 960 W |
| 24 V | ●                           | ●     | ●     | ●     |

Model selection

→ P.10 **C**



Conforms to transformer standards



Ambient operating temperature of -40°C to 70°C




Life expectancy: 10 years



# Various Applications and Requirements.

## Din Rail Mounting, Maintenance Forecast Monitor


Replacement time notifications are output and displayed, allowing the power supply to be used until the very end of its service life, reducing maintenance costs.

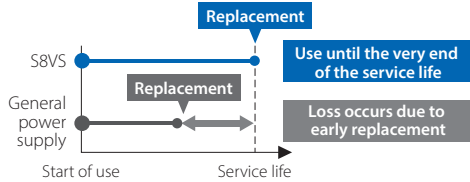

Replacement time can be seen at a glance



### S8VS-A

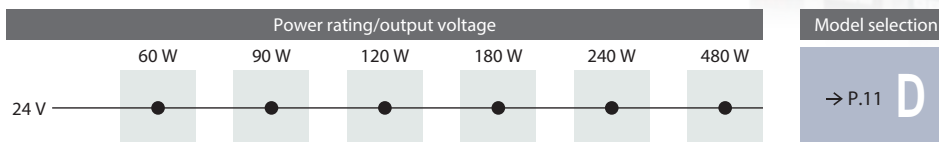

Ambient operating temperature of -10°C to 60°C

**10 YEARS**

Life expectancy: 10 years




## For Installation in Equipment, Low-voltage Detection Output

Unit and secondary load errors are detected and a signal is output.



### S8JX-P

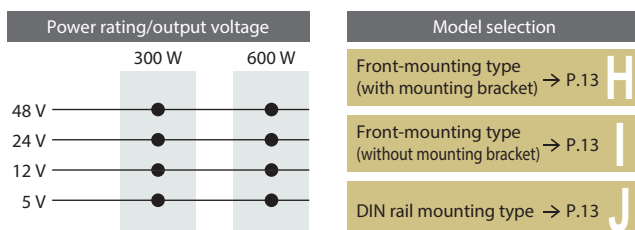

Ambient operating temperature of -10°C to 70°C

**10 YEARS**

Life expectancy: 10 years (excluding fan)



# S8VK-S

DIN rail mounting Power Supply

## Function Comparison Table



30 W/60 W 120 W 240 W 480 W

# S8VK-G



15 W 30 W 60 W 120 W 240 W 480 W

|   |   |   |                 |
|---|---|---|-----------------|
| <b>I/O connections</b>                            | Push-In Plus* <sup>1</sup>              | Yes   | —               |
|   | Screw (Rise-up)* <sup>1</sup>           | —   | Yes             |
|   | Screw                                   | —   | —               |
|   | Connector                               | —   | —               |
| <b>Mounting</b>                                   | DIN rail mounting                       | Yes (Side-by-side mounting possible* <sup>2</sup> ) | Yes             |
|   | Direct-mounting type (screw)            | See note 3.   | See note 3.     |
| <b>Input voltage (Voltage range)</b>              | Single phase AC                         | 85 to 264   | 85 to 264       |
|   | 3-phase AC                              | —   | —               |
|   | DC* <sup>4</sup>                        | 90 to 350   | 90 to 350       |
| <b>Built-in fan</b>                               |   | No  | No              |
| <b>Boost current*<sup>5</sup></b>                 |   | Yes   | Yes             |
| <b>Additional functions</b>                       | Low-voltage detection                   | Yes (Only 240 W, 480 W)                             | —               |
|   | Remote control                          | —   | —               |
|   | Remote sensing                          | —   | —               |
|   | Maintenance forecast monitor            | —   | —               |
|   | Voltage and current display             | —   | —               |
| <b>Coated PCB*<sup>6</sup></b>                    |   | Yes   | Optional models |
| <b>Parallel operation*<sup>7</sup></b>            |   | Yes   | Yes             |
| <b>Ambient operating temperature*<sup>8</sup></b> |   | -40°C to 70°C                                       | -40°C to 70°C   |
| <b>Standards</b>                                  | UL 508                                  | Yes   | Yes             |
|   | CSA C22.2 No.107.1                      | Yes   | Yes             |
|   | UL 1310 Class 2 output* <sup>10</sup>   | Yes   | Yes             |
|   | UL 62368-1                              | Recognition (altitudes up to 3,000m)                | Recognition     |
|   | CSA C22.2 No.62368-1                    | Yes (altitudes up to 3,000m)                        | Yes             |
|   | EN 62368-1                              | Yes (altitudes up to 3,000m)                        | Yes             |
|   | UL 61010-2-201                          | —   | —               |
|   | CSA C22.2 No.61010-2-201                | —   | —               |
|   | EN 61010-2-201                          | —   | —               |
|   | EN 62477-1                              | Yes (altitudes up to 3,000m)                        | Yes             |
|   | Overvoltage Category III (EN 62477-1)   | Yes   | Yes             |
|   | IEC/EN 61558-2-16                       | Yes   | Yes             |
|   | Harmonic current emissions IEC61000-3-2 | Yes   | Yes             |
|   | EMI (EN 61204-3, EN 55011)              | Class B   | Class B         |
| Marine Standards* <sup>12</sup>                   | LR                                      | LR  |                 |
| SEMI* <sup>13</sup>                               | SEMI F47                                | SEMI F47  |                 |
| <b>Reliability</b>                                | Warranty Period* <sup>14</sup>          | 5 years   | 3 years         |
|   | Life expectancy* <sup>14</sup>          | 10 years  | 10 years        |
| <b>Model selection</b>                            |   | P.10 <b>A</b>                                       | P.10 <b>B</b>   |

\*1. Round terminals and forked terminals cannot be used. \*2. For side-by-side mounting, conditions apply. For details, refer to the S8VK-S Power Supplies datasheet. \*3. Separately sold brackets are required. \*4. For DC input, conditions apply for compliance with some safety standards and some models may not be standard certified. Refer to the datasheet of each product for details.

\*5. Conditions apply to boost current output. Refer to the datasheet of each product for details. \*6. Chip part mounting surfaces are coated. \*7. Conditions apply to parallel operation. Refer to the datasheet of each product for details. \*8. The maximum ambient operating temperatures for standard mounting conditions are shown. Derating is required according to the temperature. Also, derating may vary depending upon mounting conditions and input voltage. Refer to the datasheet of each product for details.



# S8FS-G

General-purpose Power Supply

## S8VK-T



120 W 240 W 480 W 960 W

## S8VS-A




60 W 90 W 120 W 180 W  
240 W 480 W

|  |   |
|--|---|
| —  | —   |
| Yes  | —   |
| —  | Yes   |
| —  | —   |
| Yes  | Yes   |
| See note 3.  | See note 3.                                       |
| 340 to 576   | 85 to 264   |
| 320 to 576   | —   |
| 450 to 810<br>(DC input cannot be used for 960 W.) | 80 to 370<br>(DC input cannot be used for 480 W.) |
| No   | No  |
| Yes  | —   |
| —  | Yes (excluding 60 W)                              |
| —  | —   |
| —  | —   |
| —  | Yes   |
| —  | 7-segment LED                                     |
| Optional models                                    | Optional models                                   |
| Yes  | —   |
| -40°C to 70°C                                      | -10°C to 60°C                                     |
| Yes  | Yes   |
| —  | Yes   |
| —  | Yes   |
| —  | Recognition<br>(Only 480W)                        |
| —  | Yes (Only 480W)                                   |
| Listing  | —   |
| Yes  | —   |
| Yes  | Yes   |
| Yes  | Yes   |
| Yes  | —   |
| Yes  | Yes   |
| Class B  | Class A   |
| LR   | —   |
| SEMI F47   | SEMI F47  |
| 3 years  | 3 years   |
| 10 years   | 10 years  |

P.10 **C**

P.11 **D**

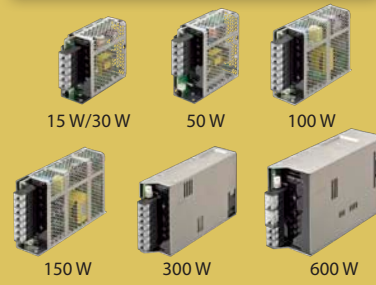

15 W/30 W 50 W 100 W  
150 W 300 W 600 W

## S8JX-P



300 W 600 W

|   |                          |
|---|--------------------------|
| —   | —                        |
| —   | —                        |
| Yes (Terminal block cover for preventing screw dropout)                       | Yes                      |
| Optional models   | —                        |
| Yes   | Yes                      |
| Yes   | Yes                      |
| 85 to 264   | 85 to 264                |
| —   | —                        |
| 80 to 370 (15 W to 150 W)<br>120 to 370 (300 W or less)<br>120 to 350 (600 W) | 80 to 370                |
| No (150 W or less)<br>Yes (300 W, 600 W)                                      | Yes                      |
| —   | Yes                      |
| —   | Yes                      |
| Optional models<br>(100 W or more, 24 V only)                                 | Yes                      |
| —   | Yes                      |
| —   | —                        |
| Optional models   | Optional models          |
| Optional models (600 W, 24 V only)  | Yes                      |
| -20°C to 70°C   | -10°C to 70°C            |
| Yes <sup>*9</sup>   | Yes                      |
| Yes <sup>*9</sup>   | Yes                      |
| —   | —                        |
| Recognition<br>(altitudes up to 3,000m)                                       | Recognition              |
| Yes (altitudes up to 3,000m)  | Yes                      |
| —   | —                        |
| —   | —                        |
| Yes (altitudes up to 3,000m)  | Yes                      |
| Yes   | Yes                      |
| Yes   | —                        |
| Yes <sup>*11</sup>  | Yes                      |
| Class B   | Class B                  |
| —   | —                        |
| SEMI F47  | SEMI F47                 |
| 3 years   | 5 years                  |
| 10 years (including fan)  | 10 years (excluding fan) |

P.12 **E F G**

P.13 **H I J**

\*9. Connector type is excluded. Also, optional models may be UL Recognition certified. For details, refer to the S8FS-G series Power Supplies Datasheet. \*10. Only products of less than 100 W are supported as per standard requirements. For applicable models, refer to the datasheet of each product. \*11. 150 W models have a limited load ratio. \*12. Conditions apply to support marine standards. For details, refer to the datasheet of each product. \*13. For 200 VAC input. \*14. Conditions apply to the warranty period and life expectancy. For details, refer to the datasheet of each product.

# S8VK-S/S8VK-G/S8VK-T

## S8VK-S

### List of Models

| A | Power rating | Rated input voltage  | Rated output voltage (DC) | Rated output current | Maximum boost current | Dimensions: W × H × D (mm) | Model       |
|---|--------------|--|---------------------------|----------------------|-----------------------|----------------------------|-------------|
|   | 30 W         | 100 to 240 VAC<br>( Allowable range:<br>85 to 264 VAC,<br>90 to 350 VDC* ) | 24 V                      | 1.3 A                | 1.56 A                | 32 × 90 × 86               | S8VK-S03024 |
|   | 60 W         |  |                           | 2.5 A                | 3 A                   | 32 × 90 × 86               | S8VK-S06024 |
|   | 120 W        |  |                           | 5 A                  | 6 A                   | 55 × 90 × 86               | S8VK-S12024 |
|   | 240 W        |  |                           | 10 A                 | 15 A                  | 38 × 124 × 117.8           | S8VK-S24024 |
|   | 480 W        |  |                           | 20 A                 | 30 A                  | 60 × 124 × 117.8           | S8VK-S48024 |

Place a check for the items you're interested in.

## S8VK-G

### List of Models

| B | Power rating | Rated input voltage  | Rated output voltage (DC) | Rated output current | Maximum boost current | Dimensions: W × H × D (mm) | Model            |             |
|---|--------------|--|---------------------------|----------------------|-----------------------|----------------------------|------------------|-------------|
|   | 15 W         | 100 to 240 VAC<br>( Allowable range:<br>85 to 264 VAC,<br>90 to 350 VDC* ) | 24 V                      | 5 V                  | 3 A                   | 3.6 A                      | 22.5 × 90 × 86   | S8VK-G01505 |
|   |              |  |                           | 12 V                 | 1.2 A                 | 1.44 A                     |                  | S8VK-G01512 |
|   |              |  |                           | 24 V                 | 0.65 A                | 0.78 A                     |                  | S8VK-G01524 |
|   | 30 W         |  |                           | 5 V                  | 5 A                   | 6 A                        | 32 × 90 × 86     | S8VK-G03005 |
|   |              |  |                           | 12 V                 | 2.5 A                 | 3 A                        |                  | S8VK-G03012 |
|   |              |  |                           | 24 V                 | 1.3 A                 | 1.56 A                     |                  | S8VK-G03024 |
|   | 60 W         |  |                           | 12 V                 | 4.5 A                 | 5.4 A                      | 32 × 90 × 106    | S8VK-G06012 |
|   |              |  |                           | 24 V                 | 2.5 A                 | 3 A                        |                  | S8VK-G06024 |
|   | 120 W        |  |                           | 24 V                 | 5 A                   | 6 A                        | 40 × 125 × 117.8 | S8VK-G12024 |
|   | 240 W        | 24 V   | 10 A                      | 12 A                 | 60 × 125 × 145.6      | S8VK-G24024                |                  |             |
|   |              | 48 V   | 5 A                       | 6 A                  |                       | S8VK-G24048                |                  |             |
|   | 480 W        | 24 V   | 20 A                      | 24 A                 | 95 × 125 × 145.6      | S8VK-G48024                |                  |             |
|   |              | 48 V   | 10 A                      | 12 A                 |                       | S8VK-G48048                |                  |             |

Place a check for the items you're interested in.

## S8VK-T

### List of Models

| C   | Power rating | Rated input voltage   | Rated output voltage (DC) | Rated output current | Maximum boost current | Dimensions: W × H × D (mm) | Model       |
|---|--------------|---|---------------------------|----------------------|-----------------------|----------------------------|-------------|
|   | 120 W        | 2-phase<br>380 to 480 VAC<br>( Allowable range:<br>340 to 576 VAC ) | 24 V                      | 5 A                  | 6 A                   | 40 × 125 × 117.8           | S8VK-T12024 |
|   | 240 W        |   |                           | 10 A                 | 12 A                  | 60 × 125 × 145.6           | S8VK-T24024 |
|   | 480 W        | 3-phase<br>380 to 480 VAC<br>( Allowable range:<br>320 to 576 VAC ) |                           | 20 A                 | 24 A                  | 95 × 125 × 145.6           | S8VK-T48024 |
|   |              | 450 to 600 VDC<br>( Allowable range:<br>450 to 810 VDC* )           |                           |                      |                       |                            |             |
|   | 960 W        | 2-phase<br>380 to 480 VAC<br>( Allowable range:<br>340 to 576 VAC ) |                           | 32 A                 | —                     | 135 × 125 × 145.6          | S8VK-T96024 |
| 3-phase<br>380 to 480 VAC<br>( Allowable range:<br>320 to 576 VAC ) |              | 40 A  |                           | 48 A                 |                       |                            |             |

Place a check for the items you're interested in.

\*Refer to the datasheet of each product for information on which standards are applicable when DC input is used.

# S8VS-A

## List of Models

Place a check for the items you're interested in.


| D     | Power rating | Rated input voltage   | Rated output voltage (DC) | Rated output current | Maximum boost current | Alarm output*2   | UL Class 2 output | Dimensions: W × H × D (mm) | Model (screw terminal block) |
|-------|--------------|---|---------------------------|----------------------|-----------------------|------------------|-------------------|----------------------------|------------------------------|
|       | 60 W         | 100 to 240 VAC<br>( Allowable range: 85 to 264 VAC, 80 to 370 VDC*1 ) | 24 V                      | 2.5 A                | —                     | —                | Yes               | 40 × 95 × 103.3            | S8VS-06024A                  |
|       | 90 W         |   |                           | 3.75 A               |                       | Sinking          | 50 × 115 × 116.2  | S8VS-09024A                |                              |
|       |              |   |                           | Sinking              |                       | Yes              |                   | S8VS-09024AS               |                              |
|       |              |   |                           | Sourcing             |                       | S8VS-09024AP     |                   |                            |                              |
|       |              |   |                           | Sourcing             |                       | Yes              |                   | S8VS-09024APS              |                              |
|       | 120 W        |   |                           | 5 A                  |                       | Sinking          | S8VS-12024A       |                            |                              |
|       | 180 W        |   |                           | 7.5 A                |                       | Sourcing         | 75 × 115 × 120.3  | S8VS-12024AP               |                              |
|       |              |   |                           | 240 W                |                       | 10 A             | Sinking           | 100 × 115 × 120.2          | S8VS-18024A                  |
|       | Sourcing     |   |                           |                      |                       | S8VS-18024AP     |                   |                            |                              |
| 480 W | 20 A         |   |                           | 30 A (200 VAC)       |                       | Sinking/Sourcing | 150 × 115 × 122.2 | S8VS-24024A                |                              |
|       | Sourcing     | S8VS-24024AP  |                           |                      |                       |                  |                   |                            |                              |

\*1. The range for compliance with EU Directives and safety standards (UL, EN, etc) is 100 to 240 VAC (85 to 264 VAC).

\*2. In the Alarm output column, sinking indicates an emitter COM and sourcing indicates a collector COM.

### About dimensions shown

In the case of standard mounting, the width (W) and height (H) are given with the distance from the DIN rail serving as the depth (D).

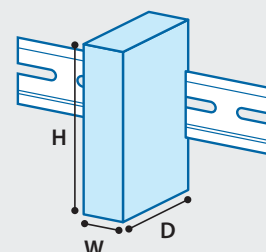

# S8FS-G

## List of Models

### ●With cover/Direct-mounting type

Place a check for the items you're interested in.

| E     | Power rating | Rated input voltage | Rated output voltage (DC)   | Rated output current | Built-in fan                                | Dimensions: W × H × D (mm) | Model                                       |
|-------|--------------|---------------------|---|----------------------|---|----------------------------|---|
|       | E            | 15 W                | 100 to 240 VAC<br>(Allowable range: 85 to 264 VAC, 80 to 370 VDC* <sup>**</sup> ) | 5 V                  | 3 A   | No                         | 35 × 82 × 99                                |
| 12 V  |              |                     |   | 1.3 A                | S8FS-G01512C                                |                            |   |
| 15 V  |              |                     |   | 1 A                  | S8FS-G01515C                                |                            |   |
| 24 V  |              |                     |   | 0.65 A               | S8FS-G01524C                                |                            |   |
| 30 W  |              | 5 V                 |   | 6 A                  | S8FS-G03005C                                |                            |   |
|       |              | 12 V                |   | 3 A                  | S8FS-G03012C                                |                            |   |
|       |              | 15 V                |   | 2.4 A                | S8FS-G03015C                                |                            |   |
|       |              | 24 V                |   | 1.5 A                | S8FS-G03024C                                |                            |   |
| 50 W  |              | 5 V                 |   | 8 A <sup>*1</sup>    | S8FS-G05005C                                |                            |   |
|       |              | 12 V                |   | 4.3 A                | S8FS-G05012C                                |                            |   |
|       |              | 15 V                |   | 3.5 A                | S8FS-G05015C                                |                            |   |
|       |              | 24 V                |   | 2.2 A                | S8FS-G05024C                                |                            |   |
| 100 W |              | 5 V                 |   | 16 A <sup>*2</sup>   | S8FS-G10005C                                |                            |   |
|       |              | 12 V                |   | 8.5 A                | S8FS-G10012C                                |                            |   |
|       |              | 15 V                |   | 7 A                  | S8FS-G10015C                                |                            |   |
|       |              | 24 V                |   | 4.5 A                | S8FS-G10024C/S8FS-G10024C-500 <sup>*5</sup> |                            |   |
| 150 W |              | 5 V                 |   | 21 A <sup>*3</sup>   | S8FS-G15005C                                |                            |   |
|       |              | 12 V                |   | 13 A                 | S8FS-G15012C                                |                            |   |
|       |              | 15 V                |   | 10 A                 | S8FS-G15015C                                |                            |   |
|       |              | 24 V                |   | 6.5 A                | S8FS-G15024C/S8FS-G15024C-500 <sup>*5</sup> |                            |   |
|       |              | 48 V                |   | 3.3 A                | S8FS-G15048C                                |                            |   |
|       |              | 300 W               |   | 12 V                 | 25 A  |                            | S8FS-G30012C                                |
|       |              |                     |   | 15 V                 | 20 A  |                            | S8FS-G30015C                                |
|       |              |                     |   | 24 V                 | 14 A  |                            | S8FS-G30024C/S8FS-G30024C-500 <sup>*6</sup> |
| 48 V  | 7 A          |                     | S8FS-G30048C  |                      |   |                            |   |
| 600 W | 12 V         | 50 A                | S8FS-G60012C  |                      |   |                            |   |
|       | 15 V         | 40 A                | S8FS-G60015C  |                      |   |                            |   |
|       | 24 V         | 27 A                | S8FS-G60024C/S8FS-G60024C-500 <sup>*6</sup>                                       |                      |   |                            |   |
|       | 48 V         | 13 A                | S8FS-G60048C  |                      |   |                            |   |

Note 1. Front-mounting is not possible. To mount a Power Supply from the front, purchase a DIN Rail-mounting Power Supply and a Front-mounting Bracket (sold separately).

\*1. The output power is 40 W. \*2. The output power is 80 W. \*3. The output power is 105 W. \*4. Applicable to products produced from May 2018.

\*5. Production started in July 2022. \*6. Production started in August 2022.

### ●With cover/Direct-mounting type (Connector type)

Place a check for the items you're interested in.

| F     | Power rating | Rated input voltage | Rated output voltage (DC)   | Rated output current | Built-in fan  | Dimensions: W × H × D (mm) | Model         |
|-------|--------------|---------------------|---|----------------------|---------------|----------------------------|---------------|
|       | F            | 15 W                | 100 to 240 VAC<br>(Allowable range: 85 to 264 VAC, 80 to 370 VDC* <sup>*1</sup> ) | 24 V                 | 0.65 A        | No                         | 35 × 82 × 99  |
| 30 W  |              | 1.5 A               |   |                      | S8FS-G03024CE |                            |               |
| 50 W  |              | 2.2 A               |   |                      | 36 × 97 × 99  |                            | S8FS-G05024CE |
| 100 W |              | 4.5 A               |   |                      | 38 × 97 × 129 |                            | S8FS-G10024CE |
| 150 W |              | 6.5 A               |   |                      | 38 × 97 × 159 |                            | S8FS-G15024CE |

\*1. Applicable to products produced from May 2018.

### ●With cover/DIN rail mounting type

Place a check for the items you're interested in.

| G     | Power rating | Rated input voltage | Rated output voltage (DC)   | Rated output current | Built-in fan                                  | Dimensions: W × H × D (mm) | Model             |
|-------|--------------|---------------------|---|----------------------|---|----------------------------|-------------------|
|       | G            | 15 W                | 100 to 240 VAC<br>(Allowable range: 85 to 264 VAC, 80 to 370 VDC* <sup>**</sup> ) | 5 V                  | 3 A   | No                         | 36.2 × 82 × 117.7 |
| 12 V  |              |                     |   | 1.3 A                | S8FS-G01512CD                                 |                            |                   |
| 15 V  |              |                     |   | 1 A                  | S8FS-G01515CD                                 |                            |                   |
| 24 V  |              |                     |   | 0.65 A               | S8FS-G01524CD                                 |                            |                   |
| 30 W  |              | 5 V                 |   | 6 A                  | S8FS-G03005CD                                 |                            |                   |
|       |              | 12 V                |   | 3 A                  | S8FS-G03012CD                                 |                            |                   |
|       |              | 15 V                |   | 2.4 A                | S8FS-G03015CD                                 |                            |                   |
|       |              | 24 V                |   | 1.5 A                | S8FS-G03024CD                                 |                            |                   |
| 50 W  |              | 5 V                 |   | 8 A <sup>*1</sup>    | S8FS-G05005CD                                 |                            |                   |
|       |              | 12 V                |   | 4.3 A                | S8FS-G05012CD                                 |                            |                   |
|       |              | 15 V                |   | 3.5 A                | S8FS-G05015CD                                 |                            |                   |
|       |              | 24 V                |   | 2.2 A                | S8FS-G05024CD                                 |                            |                   |
| 100 W |              | 5 V                 |   | 16 A <sup>*2</sup>   | S8FS-G10005CD                                 |                            |                   |
|       |              | 12 V                |   | 8.5 A                | S8FS-G10012CD                                 |                            |                   |
|       |              | 15 V                |   | 7 A                  | S8FS-G10015CD                                 |                            |                   |
|       |              | 24 V                |   | 4.5 A                | S8FS-G10024CD/S8FS-G10024CD-500 <sup>*5</sup> |                            |                   |
| 150 W |              | 5 V                 |   | 21 A <sup>*3</sup>   | S8FS-G15005CD                                 |                            |                   |
|       |              | 12 V                |   | 13 A                 | S8FS-G15012CD                                 |                            |                   |
|       |              | 15 V                |   | 10 A                 | S8FS-G15015CD                                 |                            |                   |
|       |              | 24 V                |   | 6.5 A                | S8FS-G15024CD/S8FS-G15024CD-500 <sup>*5</sup> |                            |                   |
|       |              | 48 V                |   | 3.3 A                | S8FS-G15048CD                                 |                            |                   |

# S8FS-G/S8JX-P

## S8FS-G

### List of Models

#### ●With cover/DIN rail mounting type

Place a check for the items you're interested in.

| G     | Power rating  | Rated input voltage   | Rated output voltage (DC) | Rated output current | Built-in fan                                  | Dimensions: W × H × D (mm) | Model   |
|-------|---|---|---------------------------|----------------------|---|----------------------------|---|
|       | 300 W   | 100 to 240 VAC<br>(Allowable range: 85 to 264 VAC, 120 to 370 VDC*) |                           | 12 V                 | 25 A  | Yes                        | 42.5 × 102 × 201                              |
| 15 V  |   |   |                           | 20 A                 | S8FS-G30015CD                                 |                            |   |
| 24 V  |   |   |                           | 14 A                 | S8FS-G30024CD/S8FS-G30024CD-500* <sup>6</sup> |                            |   |
| 48 V  |   |   |                           | 7 A                  | S8FS-G30048CD                                 |                            |   |
| 600 W | 100 to 240 VAC<br>(Allowable range: 85 to 264 VAC, 120 to 350 VDC*) |   | 12 V                      | 50 A                 | Yes   | 62.5 × 120 × 221           | S8FS-G60012CD                                 |
|       |   |   | 15 V                      | 40 A                 |   |                            | S8FS-G60015CD                                 |
|       |   |   | 24 V                      | 27 A                 |   |                            | S8FS-G60024CD/S8FS-G60024CD-500* <sup>6</sup> |
|       |   |   | 48 V                      | 13 A                 |   |                            | S8FS-G60048CD                                 |

\*1. The output power is 40 W. \*2. The output power is 80 W. \*3. The output power is 105 W. \*4. Applicable to products produced from May 2018.

\*5. Production started in July 2022. \*6. Production started in August 2022.

Note 1. Refer to the datasheet of each product for details.

## S8JX-P

### List of Models

#### ●Front-mounting type (with mounting bracket)

Place a check for the items you're interested in.

| H     | Power rating | Rated input voltage  | Rated output voltage (DC) | Rated output current | Maximum boost current | Built-in fan | Dimensions: W × H × D (mm) | Model                |
|-------|--------------|--|---------------------------|----------------------|-----------------------|--------------|----------------------------|----------------------|
|       | 300 W        | 100 to 240 VAC<br>(Allowable range: 85 to 264 VAC, 80 to 370 VDC*) |                           | 5 V                  | 60 A                  | —            | Yes                        | 77.6 × 124.3 × 217.3 |
| 12 V  |              |  |                           | 27 A                 | —                     | S8JX-P30012C |                            |                      |
| 24 V  |              |  |                           | 14 A                 | 16.5 A (200 VAC)      | S8JX-P30024C |                            |                      |
| 48 V  |              |  |                           | 7 A                  | —                     | S8JX-P30048C |                            |                      |
| 600 W |              |  | 5 V                       | 120 A                | —                     | Yes          | 116.6 × 124.3 × 217.3      | S8JX-P60005C         |
|       |              |  | 12 V                      | 53 A                 | —                     |              |                            | S8JX-P60012C         |
|       |              |  | 24 V                      | 27 A                 | 31 A (200 VAC)        |              |                            | S8JX-P60024C         |
|       |              |  | 48 V                      | 13 A                 | —                     |              |                            | S8JX-P60048C         |

#### ●Front-mounting type (without mounting bracket)

Place a check for the items you're interested in.

| I     | Power rating | Rated input voltage  | Rated output voltage (DC) | Rated output current | Maximum boost current | Built-in fan | Dimensions: W × H × D (mm) | Model         |
|-------|--------------|--|---------------------------|----------------------|-----------------------|--------------|----------------------------|---------------|
|       | 300 W        | 100 to 240 VAC<br>(Allowable range: 85 to 264 VAC, 80 to 370 VDC*) |                           | 5 V                  | 60 A                  | —            | Yes                        | 71 × 92 × 165 |
| 12 V  |              |  |                           | 27 A                 | —                     | S8JX-P30012N |                            |               |
| 24 V  |              |  |                           | 14 A                 | 16.5 A (200 VAC)      | S8JX-P30024N |                            |               |
| 48 V  |              |  |                           | 7 A                  | —                     | S8JX-P30048N |                            |               |
| 600 W |              |  | 5 V                       | 120 A                | —                     | Yes          | 110 × 92 × 164.8           | S8JX-P60005N  |
|       |              |  | 12 V                      | 53 A                 | —                     |              |                            | S8JX-P60012N  |
|       |              |  | 24 V                      | 27 A                 | 31 A (200 VAC)        |              |                            | S8JX-P60024N  |
|       |              |  | 48 V                      | 13 A                 | —                     |              |                            | S8JX-P60048N  |

#### ●DIN rail mounting type


Place a check for the items you're interested in.

| J     | Power rating | Rated input voltage  | Rated output voltage (DC) | Rated output current | Maximum boost current | Built-in fan  | Dimensions: W × H × D (mm) | Model                |
|-------|--------------|--|---------------------------|----------------------|-----------------------|---------------|----------------------------|----------------------|
|       | 300 W        | 100 to 240 VAC<br>(Allowable range: 85 to 264 VAC, 80 to 370 VDC*) |                           | 5 V                  | 60 A                  | —             | Yes                        | 77.6 × 110.8 × 222.8 |
| 12 V  |              |  |                           | 27 A                 | —                     | S8JX-P30012CD |                            |                      |
| 24 V  |              |  |                           | 14 A                 | 16.5 A (200 VAC)      | S8JX-P30024CD |                            |                      |
| 48 V  |              |  |                           | 7 A                  | —                     | S8JX-P30048CD |                            |                      |
| 600 W |              |  | 5 V                       | 120 A                | —                     | Yes           | 116.6 × 110.8 × 222.8      | S8JX-P60005CD        |
|       |              |  | 12 V                      | 53 A                 | —                     |               |                            | S8JX-P60012CD        |
|       |              |  | 24 V                      | 27 A                 | 31 A (200 VAC)        |               |                            | S8JX-P60024CD        |
|       |              |  | 48 V                      | 13 A                 | —                     |               |                            | S8JX-P60048CD        |

\*The range for compliance with EU Directives and safety standards (UL, EN, etc.) is 100 to 240 VAC (85 to 264 VAC).

### About dimensions shown

In the case of standard mounting, the width (W) and height (H) are given with the distance from the DIN rail serving as the depth (D).



**Note: Do not use this document to operate the Unit.**

**OMRON Corporation Industrial Automation Company**

**Kyoto, JAPAN**

**Contact : [www.ia.omron.com](http://www.ia.omron.com)**

**Regional Headquarters**

**OMRON EUROPE B.V.**

Wegalaan 67-69, 2132 JD Hoofddorp  
The Netherlands

Tel: (31) 2356-81-300 Fax: (31) 2356-81-388

**OMRON ASIA PACIFIC PTE. LTD.**

438B Alexandra Road, #08-01/02 Alexandra  
Technopark, Singapore 119968

Tel: (65) 6835-3011 Fax: (65) 6835-3011

**OMRON ELECTRONICS LLC**

2895 Greenspoint Parkway, Suite 200  
Hoffman Estates, IL 60169 U.S.A.

Tel: (1) 847-843-7900 Fax: (1) 847-843-7787

**OMRON (CHINA) CO., LTD.**

Room 2211, Bank of China Tower,  
200 Yin Cheng Zhong Road,  
PuDong New Area, Shanghai, 200120, China

Tel: (86) 21-6023-0333 Fax: (86) 21-5037-2388

**Authorized Distributor:**

©OMRON Corporation 2017-2023 All Rights Reserved.  
In the interest of product improvement,  
specifications are subject to change without notice.

**CSM\_7\_2**

**Cat. No. T209-E1-09 1023 (0417)**