

小型デジタルパネルメータ

K3GN-NDC DC24



商品概要

1/32 DIN Digital Panel Meter, DC voltage/current/NPN input, Relay contact output

販売状況 2025/12/15 00:00 情報更新

販売状況	販売中
機種区分	標準在庫機種
標準価格(税別)	¥ 29,000

推奨代替品の最新情報につきましては、当社Webサイト(www.fa.omron.co.jp)の「生産終了品/推奨代替品」をご覧ください。 在庫状況/標準価格の最新情報につきましては、当社Webサイト(www.fa.omron.co.jp)の「在庫状況/標準価格 照会」をご覧ください。

詳細情報

Ratings/Specifications

情報更新: 2025/09/04


Power supply voltage		24 VDC
Allowable power supply voltage range	85 to 110% of the power supply voltage	
Power consumption	2.5 W max. (At maximum load with all indicators lit)	
Input type		DC voltage/DC current/Pulse (NPN)
Output type	Judgment output: Contact Comparative output: OUT1, OUT2	
Current measurement input	Measurement range	4-20: 4 to 20 mA
	Indication range	4-20: 0.00 to 22.00 mA
	Accuracy	±0.1% FS ±1 digit max. (23±3 °C)
	Input impedance	60 Ω max.
Voltage measurement input	Measurement range	1-5: 1 to 5 V 5: ±5 V 10: ±10 V
	Indication range	1-5: 0.000 to 5.500 V 5: -5.500 to 5.500 V 10: -11.00 to 11.00 V
	Accuracy	1-5: ±0.1% FS ±1 digit max. (23±3 °C) 5: ±0.1% FS ±1 digit max. (23±5 °C) 10: ±0.1% FS ±1 digit max. (23±5 °C)
	Input impedance	1 MΩ min.
Pulse measurement input	No-voltage contact	30 Hz max. ON/OFF pulse width of 16 ms min.
	Open collector	5 kHz max. ON/OFF pulse width of 90 μs min.
	Measurement range	30 Hz: 0.05 to 30.00 Hz 5 kHz: 0.05 to 5000 Hz
	Accuracy	±0.1% FS ±1 digit max. (23±5 °C)
Event input Event name		Present value hold or forced zero (Enabled only when using DC voltage/current input)
Judgment output Contact output		2 output (SPST-NO) Rated load: Resistive load: 1 A at 30 VDC Minimum applicable load: 10 mV 10 μA (failure level: P Reference value) Life expectancy: 100,000 operations min. (Electrical)/50 million operations min. (Mechanical)
Display	Display method	Negative LCD (backlit LED) 7-segment digital display, and single illuminated display

	Digits	5 digit (-19999 to 99999)		
	Character height	7 mm (green/red)		
A/D conversion method		Double integral method		
Sampling period		250 ms		
Insulation resistance		Between the entire external terminal and case: 20 M Ω min. (at 500 VDC) Between inputs, outputs, and power supply: 20 M Ω min. (at 500 VDC)		
Dielectric strength		Between the entire external terminal and case: 1,000 VAC 1min		
Noise immunity		± 480 V at power supply terminals in normal mode $\pm 1,\!500$ V at power supply terminals in common mode (waveform with 1-ns rising edge $\pm 1\mu\text{s}/100$ ns)		
Vibration resistance		Malfunction: 10 to 55 Hz, Single amplitude 0.35 mm, 10 min each in X, Y, and Z directions		
Shock resistance		Malfunction: 100 m/s², 3 times each in 6 directions		
Degree of protection		Front: NEMA4X for indoor use (equivalent to IP66) Case rear: IP20 Terminals: IP00 + finger protection (VDE0106/100)		
Memory protection		Non-volatile memory (Number of rewrites: 100,000)		
Ambient temperature		Operating: -10 to 55 °C (with no freezing or condensation) Storage: -25 to 65 °C (with no freezing or condensation)		
Ambient humidity		Operating: 25 to 85 %		
Accessories		Instruction manual, Rubber packing, Fixtures, Terminal Cover		
Weight		Approx. 100 g		


Dimensions ff報更新: 2025/09/04

Note: All units are in millimeters unless otherwise indicated.

K3GN

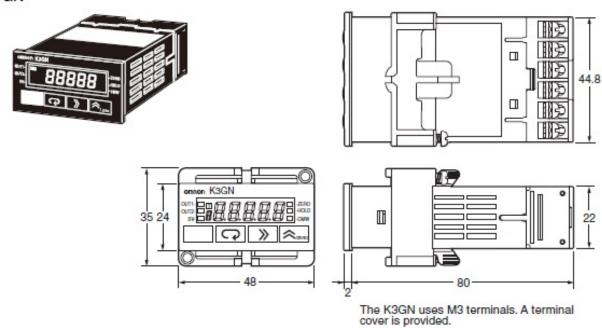

Panel Cutout Dimensions

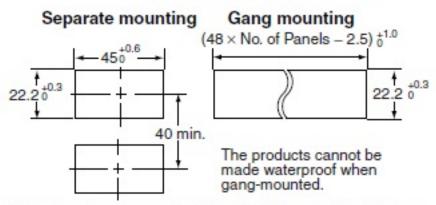

Mounting Recommended Panel Thickness 1 to 5 mm. Mount the product horizontally.

- For installation, insert the K3GN panel into the rectangular hole, insert the adaptor from the rear, and push it in to reduce the gap between the panel surface and the adaptor. Secure the Unit with the screws.
 For water-proof installation, insert the rubber gasket onto the body of the K3GN.
- If multiple mounted Units are used, make sure the ambient temperature for the K3GN does not exceed the specified temperature.


情報更新: 2025/09/04

Connection diagram

2. Status indicators -

4. Level key

3. Level indicator




1	1	I
5. Mode key	Shift key	7. Up/Zero key

Name		Functions	
1. Main display		Displays process values, parameters, and set values.	
2. Status indicators OUT1		Lit when output 1 is ON.	
	OUT2	Lit when output 2 is ON.	
	sv	Lit when a set value is being displayed or changed.	
	Т	Lit when the teaching function is enabled. Flashes when the K3GN is in teaching operation. Lit when a calibration value is being displayed during user calibration. Flashes while reading a calibration value.	
ZERO		Lit while the forced-zero function is activated.	
HOLD		Lit when HOLD input is ON.	
	CMW	Lit when communications writing is "enabled" and is out when it is "disabled."	
3. Level indicator	•	Displays the current level that the K3GN is in. (See below for details.)	
4. Level Key		Used to change the level.	
5. Mode Key		Used to allow the Main display to indicate parameters sequentially.	
6. Shift Key		Used to enable that set value to be changed. When changing a set value, this key is used to move along the digits.	
7. Up/Zero Key		Used to change a set value. Used to set or clear a forced-zero function when a measurement value is being displayed.	

Level indicator	Level		
ρ	Protect		
Not lit	Operation		
R	Adjustment		
5	Initial setting		
Ε	Communications setting		
F	Advanced function setting		
ii ii	User calibration		

Terminal arrangement




Input terminals

情報更新: 2025/09/04

Internal connection

■ Block Diagram

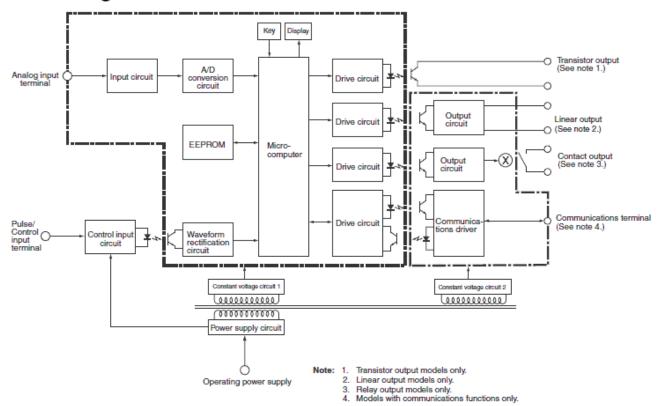

RoHS/REACH対応状況

情報更新: 2025/12/03

EU RoHS

対応状況 ※1	対応予定月 ※2	非含有証明書 ※3
® 対応済み		ダウンロードはこちら

中国 RoHS

中国 RoHS表 ※ 1 ※ 2										
Pb	Hg	Cd	Cr(VI)	PBBs	PBDE s	DBP	DIBP	BBP	DEH P	環境 保護 使用 期限
Х	0	0	0	0	0	0	0	0	0	10

- ・"対応済み"や非含有の記載がされた商品であっても、流通在庫等で未対応品が混在する可能性があります。
- ・非含有品が必要な際は、弊社営業部門もしくは販売店へお問い合わせください。

この製品のRoHS/REACH対応状況ページへ >

注意事項 • 凡例

"対応済み"で記載される商品であっても、流通在庫等で未対応品が混在する可能性があります。 非含有品が必要な際は、弊社営業部門もしくは販売店へお問い合わせください。

※1 対応状況

・ le y RoHS指令 (10物質) の非含有に対応した製品が提供可能な商品です。

対応予定 : EU RoHS指令 (10物質) の非含有に対応した製品に切り替える予定のある商品です。
 対応予定なし : EU RoHS指令 (10物質) の非含有に非対応の商品で、対応品を出す予定はありません。
 調査・確認中 : EU RoHS指令 (10物質) の非含有の対応状況を調査中または確認中の商品です。

・非該当品 :ライセンス料など無形物で、有害物質有無と関係のない商品です。

仕入先様の事情により、非含有部品としていたものが、含有品と判明した場合などやむを得ず変更することがあります。

* EU RoHS指令(10物質):

鉛(Pb) 1000ppm以下、水銀(Hg) 1000ppm以下、カドミウム(Cd) 100ppm以下、六価クロム(Cr(VI)) 1000ppm以下、ポリ臭化ビフェニル類(PBB) 1000ppm以下、ポリ臭化ジフェニルエーテル類(PBDE) 1000ppm以下、フタル酸ビス(2-エチルヘキシル) (DEHP)(別名:DOP) 1000ppm以下、フタル酸ブチルベンジル (BBP) 1000ppm以下、フタル酸ジブチル (DBP) 1000ppm以下、フタル酸ジブチル (DBP) 1000ppm以下、フタル酸ジブチル (DBP) 1000ppm以下、フタル酸ジブチル (DBP) 1000ppm以下、フタル酸ジブチル (DBP) 1000ppm以下、フタル酸ンプチル (DBP) 1000ppm以下、カドミウム(Cd) 100ppm以下、六価クロム(Cr(VI)) 1000ppm以下、プタル酸ブチルベンジル (BBP) 1000ppm以下、フタル酸ンプチルベンジル (BBP) 1000ppm以下、フタル酸ンプチルベンジル (BBP) 1000ppm以下、カルマンジル (BBP) 1000ppm以下、フタル酸ンプチルベンジル (BBP) 1000ppm以下、フタル酸ンプチルベンジル (BBP) 1000ppm以下、フタル酸ンプチルベンジル (BBP) 1000ppm以下、フタル酸ンプチルベンジル (BBP) 1000ppm以下、フタル酸ンプチル (DBP) 1000ppm以下、フタル酸シスタル酸シスタル酸シスタル酸シスタル酸シスタル (DBP) 1000ppm以下、フタル酸シスタル (DBP) 1000ppm以下、DBP (DBP) 1000ppm以下、D

※2 対応予定月

部品在庫の切り替え状況などにより、予定月が前後することがあります。

※3 非含有証明書ダウンロード

下記の非含有証明書をダウンロードすることができます。

- ・EU RoHS指令(10物質)の非含有証明書
- ・49物質の非含有証明書(当社基準)
- ※本証明書は発行日時点で非含有を証明するもので、過去に遡って非含有を証明するものではありません。

また、RoHS指令のフタル酸エステル類4物質の対応では、対応完了までの期間は出荷製品に未対応品が混在することから備考欄に対応日を記載しておりました。

既に当社にて対応品への在庫切替を完了していることから、特段のことがない限り、2022年1月12日より割愛しております。

規格認証/適合状況

UL認証	UL認証 CSA認証		CCC認証	
Yes	Yes	Yes	N/A	

LR型式承認	DNV型式承認	BV型式承認	KR型式承認	NK型式承認	ABS型式承認
(イギリス	(ノルウェー	(フランス	(韓国	(日本	(アメリカ
船舶規格)	船舶規格)	船舶規格)	船舶規格)	船舶規格)	船舶規格)
No	No	No	No	No	No

この製品の規格認証/適合状況ページへ > その他の認証はこちらのページからご検索ください >